

PP Fume Hood

■ Functions

- 1.Shell:made of 8mm white PP board which has excellent anti-corrosion performance,with seamless welding make sure a strong compact structure and tightness.
- 2.Cabinet door:made of 8mm white PP board,with shutter for ventilation inside the cabinet.
- 3.Worktop:Standard is Phenolic resin board.PP board,epoxy resin or ceramic worktop are optional.
- 4.Air collection hood:cone shape collecting hood made of white PP board.
- 5.Fluorescent lamp:fully cover fluorescent lamp,model 1200/1500 is 30W,model 1800 is 40W.
- 6.Handle:PP handle
- 7.Hinge:PP hinge
- 8.Touch control panel:with buttons of power,fan,volume switch,lighting etc.
- 9.Air deflector:8mm imported white PP board with excellent anti-corrosion performance.
- 11.Viewing window:5mm transparent PVC board


Standard Accessories:

PP Water sink, Water tap, Gas tap

Digital controller, control light, fan and speed.;

Waterproof Socket, 2 pieces.

PP/PVC duct: 4meters, diameter 250mm.

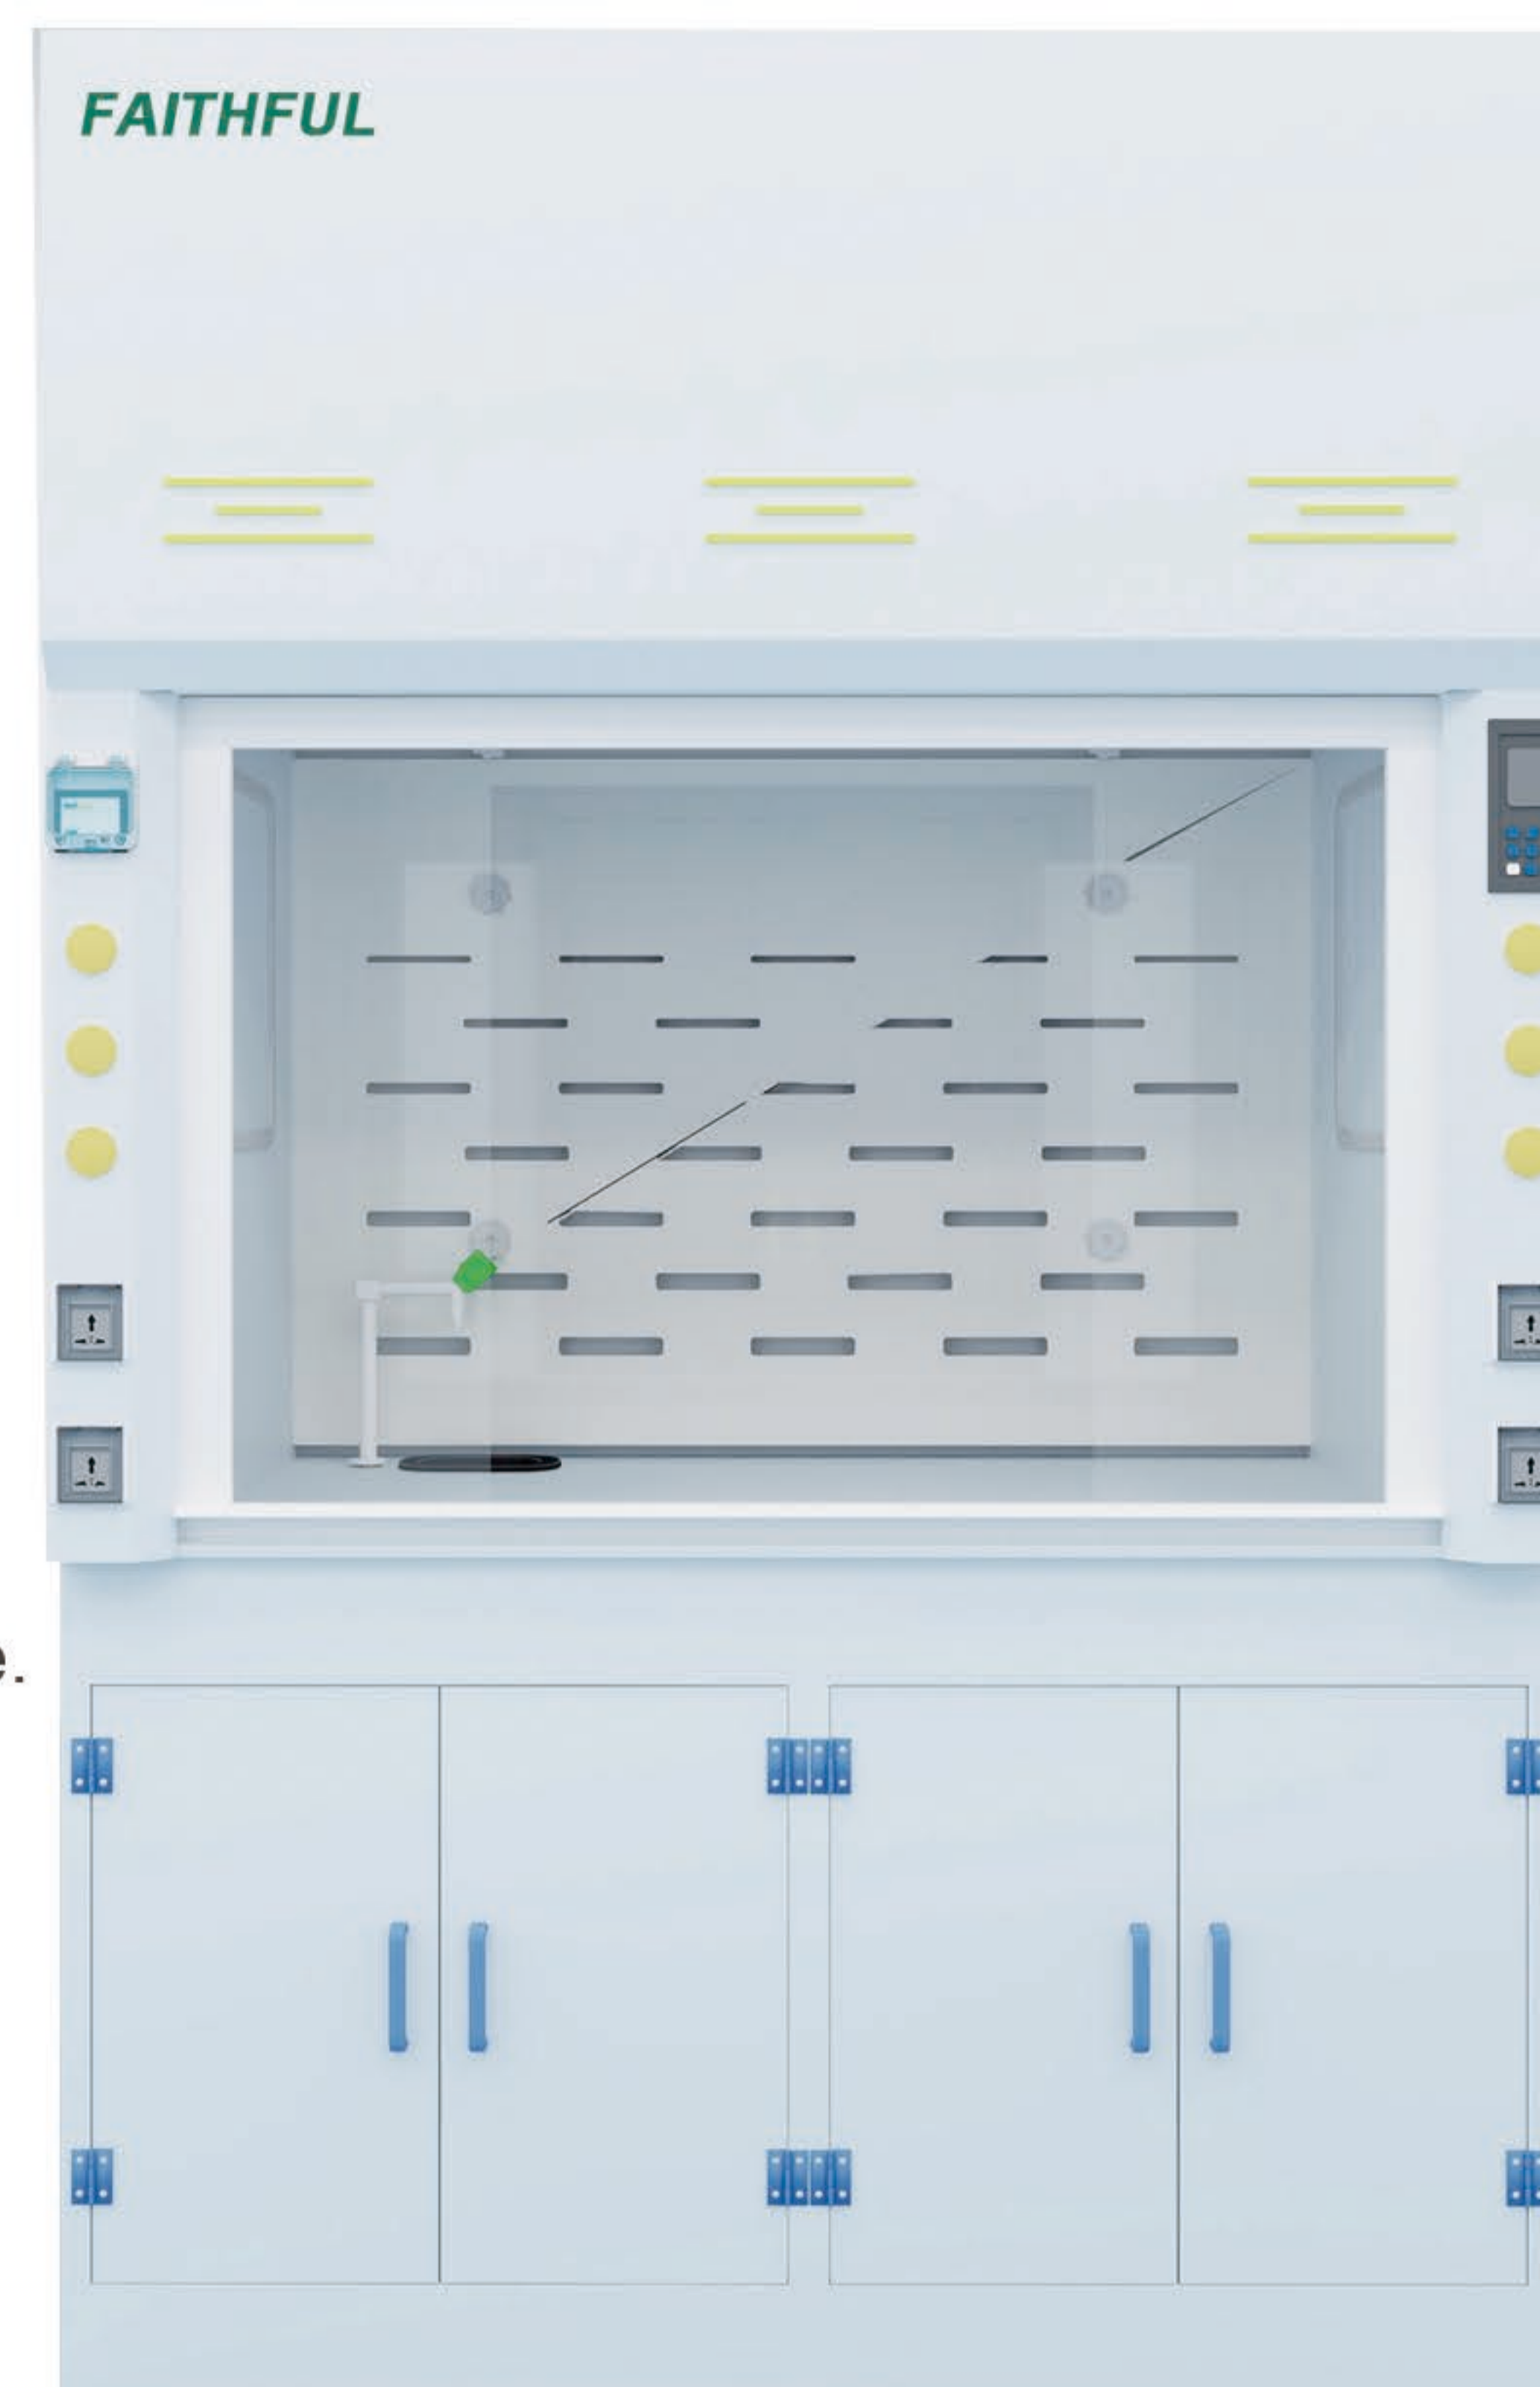

■ Parameters

| Modle | FSF-1200P | FSF-1500P | FSF-1800P |
|--------------------------|-----------------------|-----------------------|-----------------------|
| External Size(mm) | 1200*850*2350 | 1500*850*2350 | 1800*850*2350 |
| Working size(mm) | 900*700*1100 | 1300*700*1100 | 1500*700*1100 |
| Worktop height | 850mm | 850mm | 850mm |
| Main material | 8mm PP board | | |
| Window height | 750mm | 750mm | 750mm |
| Illumination | ≥300LUX | ≥300LUX | ≥300LUX |
| Gas collecting hood size | φ250 | φ250 | φ315 |
| Exhaust air rate | 1200m ³ /h | 1500m ³ /h | 1800m ³ /h |